



Installing Control 50S/T Subwoofer Using Included Wall Bracket


CAUTION: Installation must be done by qualified persons using safe rigging standards.

The installer is responsible for proper selection and use of mounting hardware, to properly and safely wall-mount the speakers.

1. The Control 50S/T comes with the speaker plate of the wall bracket pre-attached to the speaker. Ensure that the screws holding this plate to the speaker are tight.


2. Run the wiring from the power amplifier to the location desired for mounting the JBL Control 50S/T subwoofer. Also run the wiring that will connect the subwoofer to the Control 52 satellite speakers.

3. Using a level, secure the wall plate of the mounting bracket to the wall. Be sure to use appropriate wall anchors for attaching the bracket plate. Use all five screw holes for maximum integrity and safety.




(Tapping screws shown. Actual hardware and anchors utilized may differ, depending on the requirements of the wall material and structure. Secure and safe attachment is the responsibility of the installer.)

4. Attach a safety cable (not included) to the 6 mm insert on the back of the Control 50S/T cabinet using the included 6 mm screw. Prepare to attach the other end of the cable to a secondary attachment point on the wall.

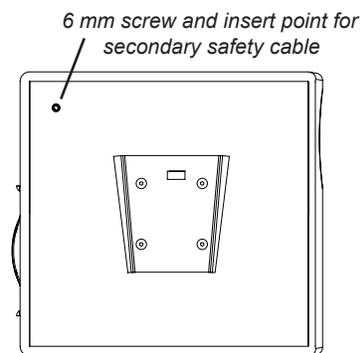


5. Position Control 50S/T subwoofer toward wall, in the orientation shown, slightly higher than the on-wall plate, then slide the Control 50S/T subwoofer downward while maintaining pressure toward the wall until the two bracket plates engage. Make sure the retaining spring latches securely into place.




6. Remove the input terminal cover, connect wiring and set the tap selector rotary switch. Replace input terminal cover, routing wires through the side opening, dressing the wiring toward the back side of the cabinet.

Removing from Wall -- If there is a need to remove the subwoofer, insert an object such as long-shaft screwdriver from the top. Leverage the handle of the screwdriver away from the wall in order to press the spring latch toward the wall to disengage the latch. While maintaining pressure on the latch in this manner, lift the subwoofer upward to remove it from the wall bracket.

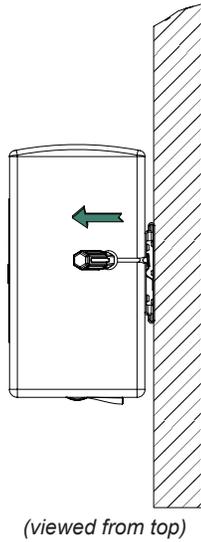

Wall Bracket Dimensions

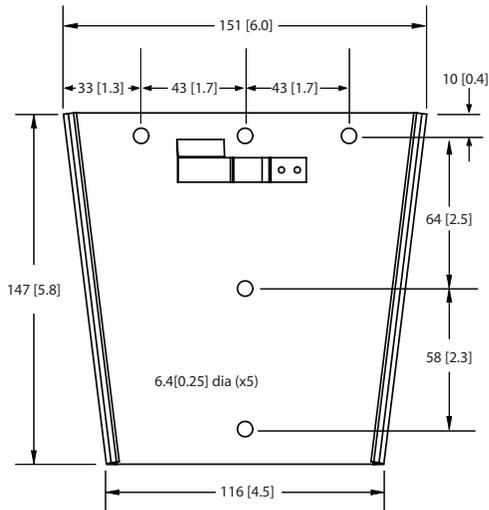

JBL Professional
 8500 Balboa Boulevard, P.O. Box 2200
 Northridge, CA 91329 USA

H A Harman International Company